

**For Non-Health Hazard Applications**

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

**LEAD FREE\***

**Series LF719**  
**Double Check Valve Assemblies**

**Sizes: 1/2" – 2" (15 – 50mm)**

Series LF719 Double Check Valve Assemblies are designed to protect drinking water supplies from dangerous cross-connections in accordance with national plumbing codes and water authority requirements.

This series may be used in only those cross-connections identified by local inspection authorities as non-health hazard applications. Check with local authority having jurisdiction regarding vertical orientation, frequency of testing or other installation requirements. The LF719 features Lead Free\* construction to comply with Lead Free\* installation requirements. Series LF719 meets the requirements of ASSE Std. 1015 and AWWA Std. C510.

**Features**

- Manufactured from Lead Free\* cast copper silicon alloy
- Separate access, top entry check valve design
- Reversible seat disc rubber, extends check valve life
- Chloramine resistant elastomers
- Replaceable seats and seat discs
- Compact design
- Top mounted screwdriver slotted ball valve test cocks
- Low pressure drop
- 1/2" – 1" (15 – 25mm) have Tee handles
- No special tools required for servicing
- Plastic on plastic check guiding reduces potential binding due to mineral deposits


**Specifications**

Series LF719 Double Check Valve Assembly shall be installed at each noted location. Provide assembly with integral shutoff valves that conform to ASSE 1015 and AWWA C510. The assembly shall have top entry access points for each check assembly, screw driver slotted test cocks and require the use of no special tools for servicing. All wetted rubber parts shall be manufactured from silicone or chloramine resistant EPDM rubber. The Lead Free\* Double Check Valve Assemblies shall comply with state codes and standards, where applicable, requiring reduced lead content. All valve seats and seat discs shall be replaceable. Seat discs shall be reversible to extend check valve life. Check valve guiding shall be plastic to plastic. The assembly shall be a Watts Series LF719.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



LF719QT

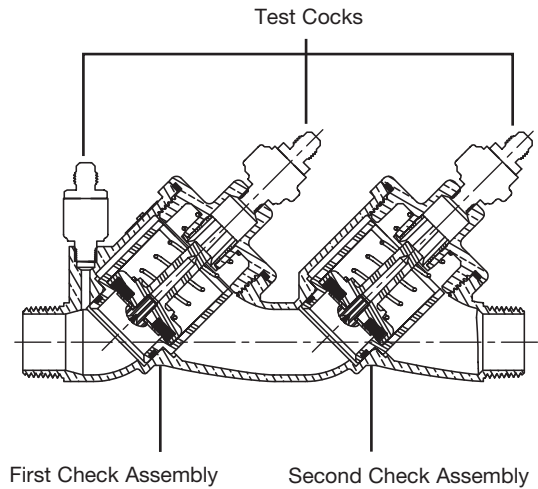

**Now Available**  
**WattsBox Insulated Enclosures.**  
 For more information, refer to literature ES-WB.

**NOTICE**  
 Inquire with governing authorities for local installation requirements

**\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.**



## Available Models

### Suffix:

- S – bronze strainer
- QT – quarter-turn ball valves

## Pressure-Temperature

Operating Pressure: 175psi (12.1 bar)  
 Operating Temperature Range: 33°F – 180°F (0.5°C – 82°C)

## Materials

- Body: Lead Free\* cast copper silicon alloy
- Elastomers: Chloramine resistant silicone and EPDM
- Check Seats: PPO
- Disc Holders: PPO

## Standards


AWWA Std C510 compliant

## Approvals



Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

## Dimensions/Weights







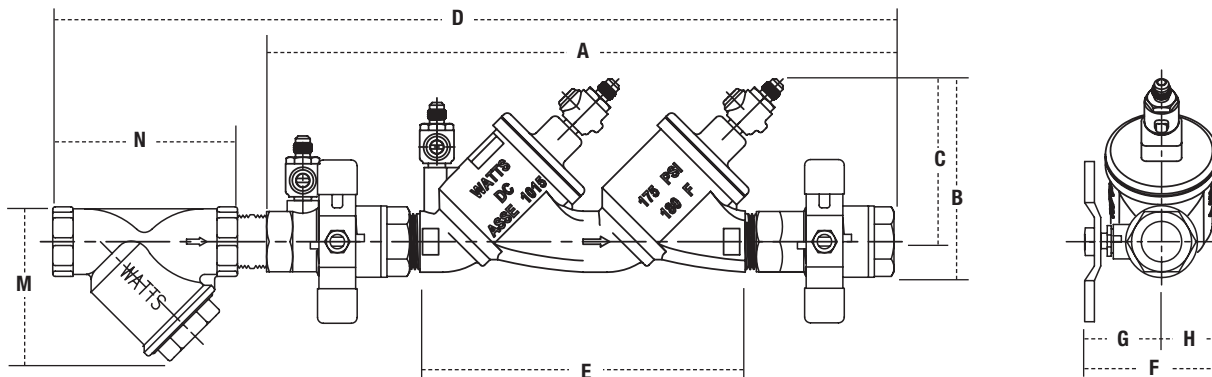


### LF719QT, LF719QT-S

SIZE (DN)		DIMENSIONS										STRAINER		WEIGHT											
in.	mm	A	B	C	D	E(LF)	F	G	H	M	N	719QT	719QT-S												
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.										
1/2	15	9 <sup>9</sup> / <sub>16</sub>	242	3 <sup>11</sup> / <sub>16</sub>	94	2 <sup>15</sup> / <sub>16</sub>	73	12 <sup>9</sup> / <sub>16</sub>	318	5 <sup>13</sup> / <sub>16</sub>	147	2 <sup>7</sup> / <sub>16</sub>	62	1 <sup>11</sup> / <sub>16</sub>	43	3/4	19	1 <sup>3</sup> / <sub>8</sub>	35	2 <sup>3</sup> / <sub>4</sub>	70	2.8	1.3	3.8	1.7
3/4	20	12 <sup>1</sup> / <sub>8</sub>	307	4 <sup>1</sup> / <sub>4</sub>	108	3 <sup>1</sup> / <sub>2</sub>	88	15 <sup>7</sup> / <sub>16</sub>	393	7 <sup>11</sup> / <sub>16</sub>	195	3 <sup>1</sup> / <sub>8</sub>	79	2 <sup>1</sup> / <sub>16</sub>	52	1 <sup>1</sup> / <sub>16</sub>	27	1 <sup>5</sup> / <sub>8</sub>	41	3 <sup>3</sup> / <sub>16</sub>	81	4.7	2.1	6.4	2.9
1	25	14 <sup>13</sup> / <sub>16</sub>	376	4 <sup>9</sup> / <sub>16</sub>	116	3 <sup>7</sup> / <sub>8</sub>	98	19 <sup>1</sup> / <sub>2</sub>	495	9 <sup>5</sup> / <sub>8</sub>	244	3 <sup>3</sup> / <sub>4</sub>	95	2 <sup>7</sup> / <sub>16</sub>	62	1 <sup>5</sup> / <sub>16</sub>	33	2 <sup>1</sup> / <sub>8</sub>	54	3 <sup>3</sup> / <sub>4</sub>	95	7.4	3.4	9.4	4.3
1 <sup>1</sup> / <sub>4</sub>	32	18 <sup>15</sup> / <sub>16</sub>	480	6 <sup>1</sup> / <sub>8</sub>	156	5 <sup>1</sup> / <sub>8</sub>	129	24 <sup>1</sup> / <sub>16</sub>	610	11 <sup>11</sup> / <sub>16</sub>	297	4 <sup>1</sup> / <sub>4</sub>	108	2 <sup>5</sup> / <sub>8</sub>	67	1 <sup>5</sup> / <sub>8</sub>	41	2 <sup>1</sup> / <sub>2</sub>	64	4 <sup>7</sup> / <sub>16</sub>	113	14.0	6.3	18.0	8.1
1 <sup>1</sup> / <sub>2</sub>	40	18 <sup>15</sup> / <sub>16</sub>	480	6 <sup>1</sup> / <sub>8</sub>	156	5 <sup>1</sup> / <sub>8</sub>	129	25 <sup>1</sup> / <sub>4</sub>	640	11 <sup>11</sup> / <sub>16</sub>	297	4 <sup>3</sup> / <sub>4</sub>	121	3 <sup>1</sup> / <sub>8</sub>	79	1 <sup>5</sup> / <sub>8</sub>	41	3	76	4 <sup>7</sup> / <sub>8</sub>	124	16.1	7.3	19.9	9.0
2	50	21 <sup>3</sup> / <sub>16</sub>	538	7 <sup>1</sup> / <sub>16</sub>	179	5 <sup>5</sup> / <sub>8</sub>	142	28 <sup>15</sup> / <sub>16</sub>	735	13 <sup>3</sup> / <sub>8</sub>	340	5 <sup>3</sup> / <sub>8</sub>	137	3 <sup>7</sup> / <sub>16</sub>	87	1 <sup>15</sup> / <sub>16</sub>	49	3 <sup>9</sup> / <sub>16</sub>	90	5 <sup>15</sup> / <sub>16</sub>	151	25.7	11.6	33.4	15.2

# Capacities

† Typical maximum flow rate (7.5 feet/sec.)

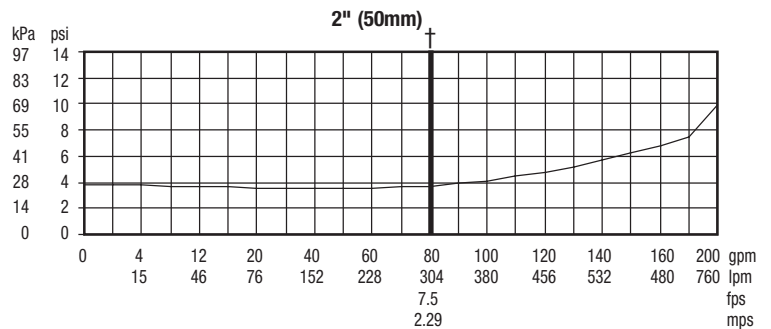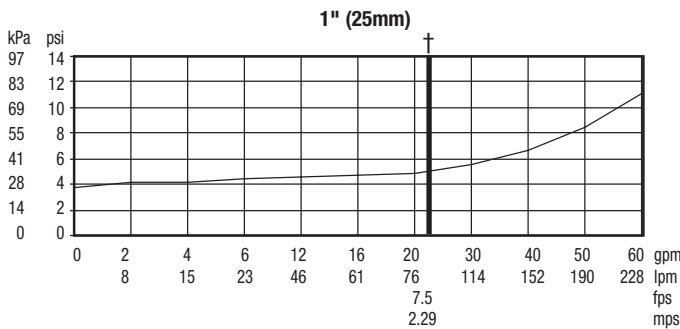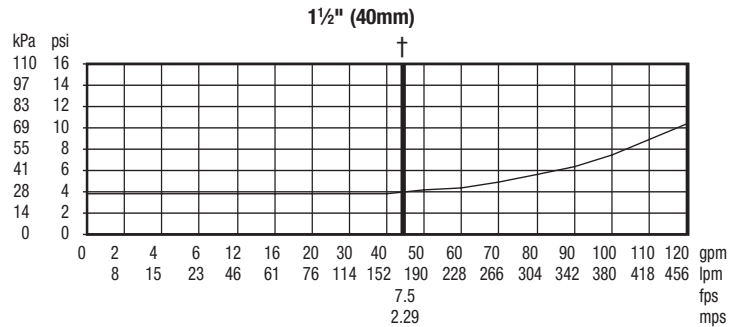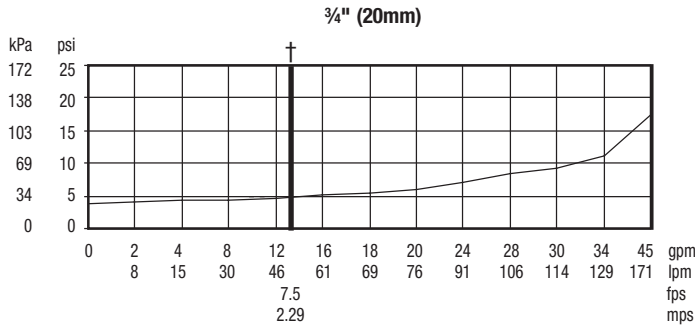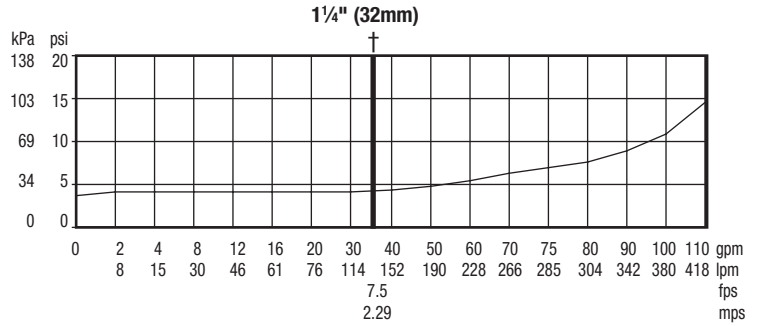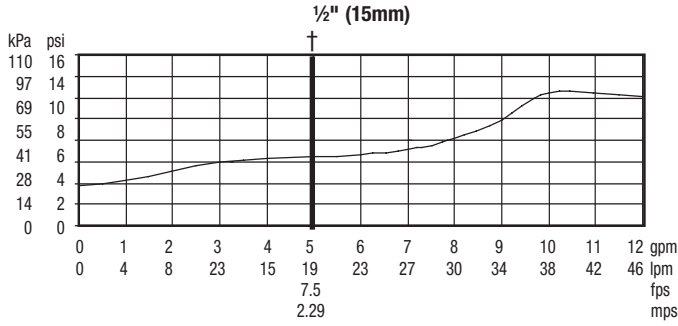

A Watts Water Technologies Company



USA: Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com  
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca